TUFFAK®

TUFFAK UC polycarbonate sheet

ULTRA CLEAR

TUFFAK UC sheet is a polycarbonate product exhibiting unsurpassed visible light transmission versus other polycarbonate sheet products. This high clarity sheet is specifically designed for use in multilayer laminates.


APPLICATIONS


Specialty laminates

Typical Properties*			
Property	Test Method	Units	Values
PHYSICAL			
Specific Gravity	ASTM D 792	-	1.2
Refractive Index @ 72°F	ASTM D 542	-	1.586
Light Transmission, Clear @ 0.118″	ASTM D 1003	%	91
Water Absorption, 24 hours	ASTM D 570	%	O.15
MECHANICAL			
Tensile Strength, Ultimate	ASTM D 638	psi	9,500
Tensile Strength, Yield	ASTM D 638	psi	9,000
Tensile Modulus	ASTM D 638	psi	340,000
Elongation	ASTM D 638	%	110
Flexural Strength	ASTM D 790	psi	13,500
Flexural Modulus	ASTM D 790	psi	345,000
Compressive Strength	ASTM D 695	psi	12,500
Compressive Modulus	ASTM D 695	psi	345,000
Izod Impact Strength, Notched @ 0.125″	ASTM D 256	ft·lbs/in	18
Izod Impact Strength, Unnotched @ 0.125"	ASTM D 256	ft·lbs/in	60 (no break)
Instrumented Impact @ 0.125″	ASTM D 3763	ft·lbs	47
THERMAL			
Coefficient of Thermal Expansion	ASTM D 696	in/in/°F	3.75 x 10-5
Heat Deflection Temperature @ 264 psi	ASTM D 648	°F	270
Heat Deflection Temperature @ 66 psi	ASTM D 648	°F	280

*Typical Properties are not intended for specification purposes

TUFFAK UC polycarbonate sheet

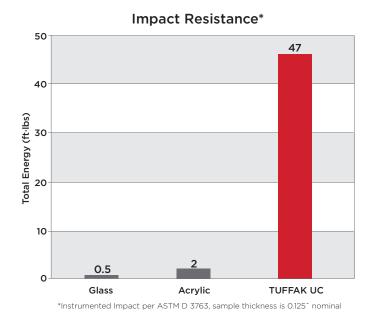

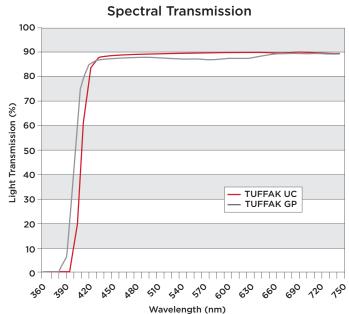

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determine the suitability of our materials and suggestions before adopting them on a commercial scale.



2218 Enterprise Jackson, MI 49203 800.877.2576 • Fax: 517.787.6380 plastics@alro.com www.alro.com/plastics